


AKUSTIK® - BAND

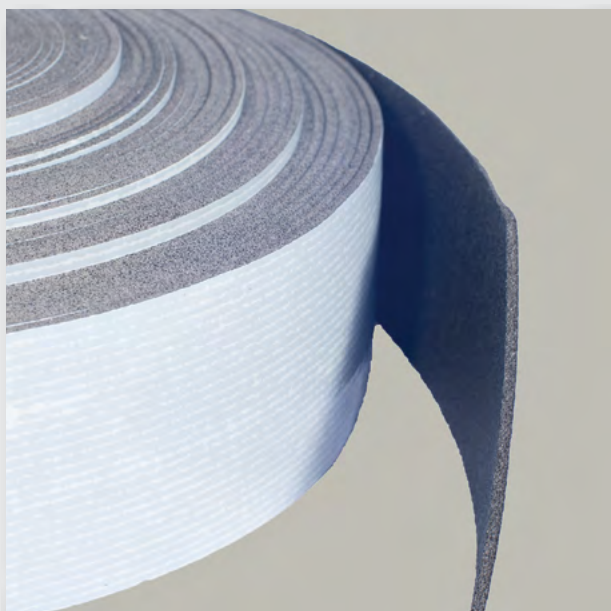

INSULATING TAPED MADE OF EXPANDED CROSS-LINKED POLYETHYLENE WITH CLOSED-CELL STRUCTURE

MATERIAL

AKUSTIK®-BAND is the gasket resistant to noises, air, water and dust. This product made of expanded reticulated polyethylene with closed cells, density 33 Kg/m³, can be supplied single/double-sided self-adhesive. On request it is possible to package every single roll with a plastic film.

WIDTH	20, 30, 40, 50, 70, 90, 100 mm Other upon request
LENGTH	20 mtl (th. 3 mm) 20 mtl (th. 5 mm) 10 mtl (th. 10 mm)
THICKNESS	3, 5, 10 mm
ADHESIVE	Acrylic water-based
COLOR	dark grey
THERMAL CONDUCTIVITY	$\lambda = 0,035 \text{ WmK}$
DENSITY	33 Kg/m ³
REACTION TO FIRE	F, B-s1, d0 upon request

FIELDS OF APPLICATION

AKUSTIK®-BAND is widely used as gaskets for metal structures for plasterboards and moveable walls, as well as for channellings, ventilation plant and plant engineering.

INSTALLATION

AKUSTIK®-BAND is easy to install thanks to its self-adhesive side and it can be applied to any surface provided that it is smooth and free of oil, dust and grease.