


# PB - BAND

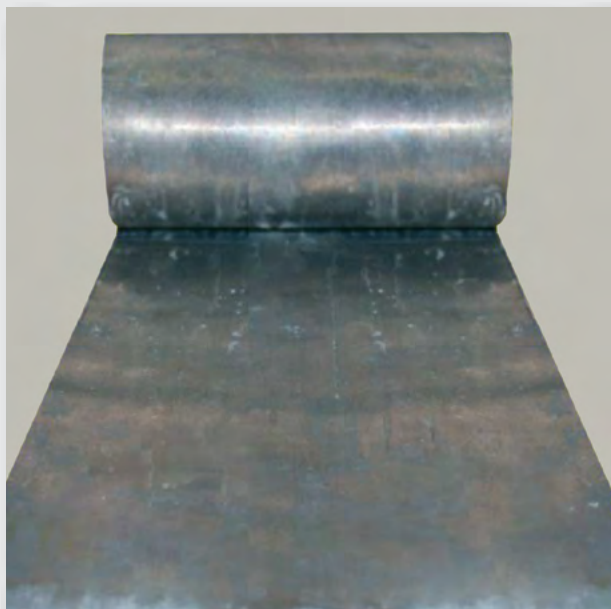

## Product in rolls

**WIDTH** 10 cm  
Other upon request

**LENGTH** 1 mtl

**THICKNESS** mm 0,35 - 0,50 - 1 - 2 - 3 - 4

**DIMENSIONS TOLERANCE** according to DIN 7715 Part 2

PB-BAND IS THE 99,99% PURE LEAD BAND

## MATERIAL

99,99% 1st choice pure lead band, to seal junctions between lead-combined plasterboards (Akustik® Gips Art. 4). Available in different thicknesses (0,35 – 0,50 – 1 - 2 - 3 - 4 mm) and variable width in order to obtain a perfect installation for soundproofing and radiation insulation.

## FIELDS OF APPLICATION

Pb-Band is used to seal junctions between lead-combined plasterboards (Akustik Gips art.4) in radiation shielding and sound insulation measures.

## INSTALLATION

Pb-Band must be placed using NDA KOLL glue. Upon request it can be also supplied with a selfadhesive side.