


AKUSTIK® - BORDER

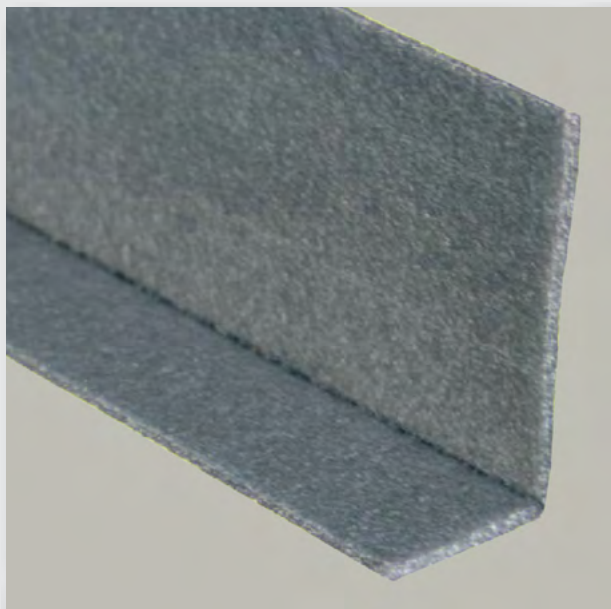

AKUSTIK®-BORDER IS THE 'L-SHAPED' BAND FOR THE PERIMETRICAL WALLS, WITH AN EASY AND FAST APPLICATION

MATERIAL

L'Akustik®-Border is made of an expanded polyethylene with a cell-closed structure and a "L" shape. It must be placed between the perimetral wall and the floor to avoid their contact.

FIELDS OF APPLICATION

Akustik®-Border can be used in all the footfall soundproofing insulation systems, as an essential adjunct to realize a perfect footfall soundproofing.

INSTALLATION

Akustik®-Border has a self-adhesive side and it is very easy to be installed.

This material must be placed between the wall and the floor and cut after the flooring.

Akustik®-Border avoids the difficult and unclear lapel of the insulating material on the perimeter walls. The part that is overlapped must be cut after floor laying and grouting

WIDTH	100+50 mm 150+50 mm
LENGTH	50 mtl
THICKNESS	6 mm
MATERIAL	expanded polyethylene