


PERFORMANT

PERFORMANT IS A PRODUCT FOR THE SOUNDPROOFING OF FLOORS IN RUBBER LATEX

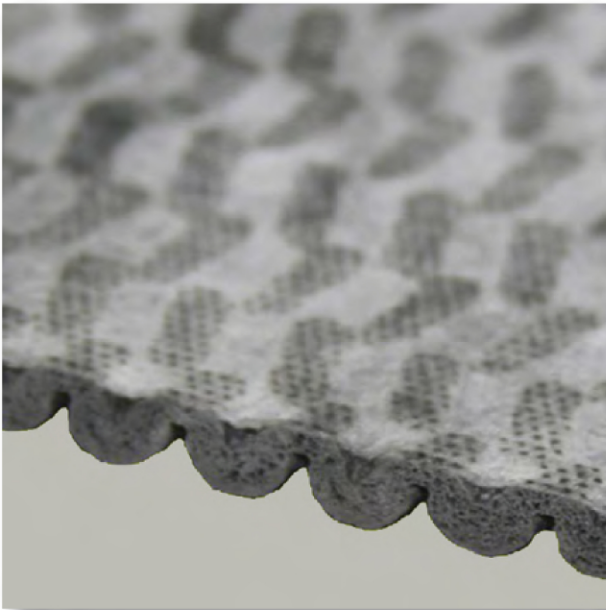

STANDARD DIMENSIONS

Rolls: h 1,22 m

Length: 12,35 m

Thickness: 10 mm

TECHNICAL CHARACTERISTICS

- **Total surface density:** 3700 g/m²
- **Thickness:** 10 mm
- **Floor insulation:** ΔL from 28 to 32 dB in function of the type of screed (estimate calculation)

MATERIAL

Performant is the rubber latex underlay with high elasticity, weight approximately 3.7 Kg/m², with a special point surface that allows to obtain a high level of acoustic insulation of the flooring.

FIELDS OF APPLICATION

Performant is recommended for double layer foundations and is applied over the lightened underlayment screed and the under-screed bed of the flooring. With screeds under 50 mm the reinforcement of the same is recommended.

INSTALLATION

The Performant underlay must be applied with the rough side facing down. The junctions must be put together and taped with adhesive polyethylene tape AKUSTIK® BAND. The detachment from the vertical surfaces is achieved with a perimeter corner junction AKUSTIK® BORDER.